



**Over 30k Followers on Instagram**  
**100+ Testimonials**  
**100K+ Impressions, Globally!**  
**1000's of online sales**  
**FAST & RELIABLE SHIPPING!**

Click below



**DURAFILAUTOTECH**



**SHOPDURAFIL.COM**

**DURAFIL.CA**







# SUPERIOR COATINGS FOR YOUR INDUSTRY

Durafil is a Canadian based manufacturer and distributor of automotive refinishing and industrial products.

Our specialty is coatings. Coatings for the automotive refinish and industrial sectors; from ***clearcoat systems to industrial topcoats***.


Our company is led by an experienced team of industry professionals, having well over 100 years of combined expertise. With this knowledge and over 40 years of “hands on” experience in the automotive repair industry, we know what customers want: premium quality, easy-to-use, fast cure, durable, high performance coatings; all at competitive pricing, while ***increasing their productivity, and reducing their labour and inventory costs***.

At Durafil this is what we deliver in every can;

**The Ultimate Performance in automotive and industrial products at competitive prices.**



Our entire product line was developed with the end user in mind, from application properties, to labour and utility costs. We’ve considered it all, and have carefully selected each premium component in every product with this philosophy in mind.

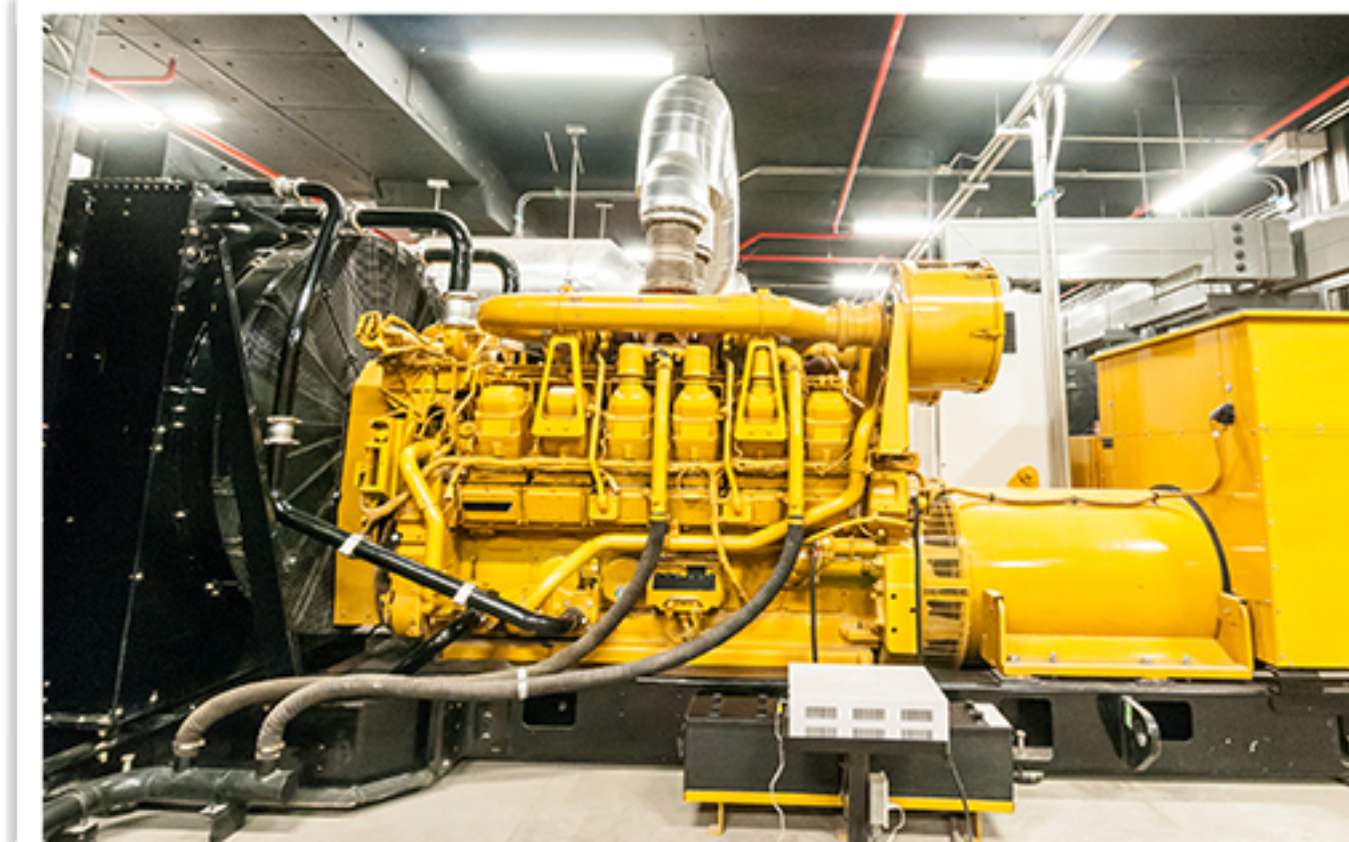






# OUR VISION, MISSION, AND OBJECTIVE AS YOUR SUPPLIER

**Our Objective** is to build long term, loyal relationships within the industry. We recognize to achieve this we need to surpass expectations in quality, performance, technical support, and customer care. We take pride in knowing that our products are innovative and our team is attentive.

**Our Vision** of being a leading global supplier of superior coatings derives from our ability developing advanced industry products, alongside our superior technical service and training.

**Our Mission** is to provide industrial sectors with premium quality, ready to use, durable, high performance coatings; all at competitive pricing; while increasing productivity, and reducing labour and inventory costs.

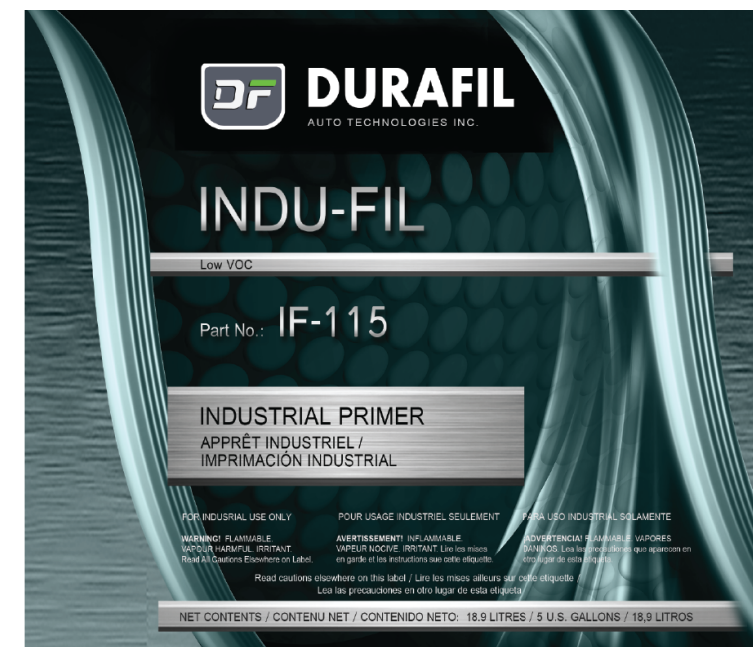





# MEETING THE LEGISLATIVE REQUIREMENTS

Amongst numerous performance properties, mainstream paints and coatings have been developed to meet the requisites towards environmental friendliness and user safety.

Energy consumption and VOC emissions are carefully observed. As global requirements are stringent, only the most capable manufacturers can follow this formality; while maintaining performance and quality.

Ongoing research and development of our industrial and automotive coatings is a key factor in our labs. Our goal here is to maintain technology with Low VOC, uniform colour and gloss, anti-corrosion, adhesion, and ageing properties.

As a result of Durafil's leading chemists, engineers, and combined expertise; we are proud to provide a range of best-in-class paints and coatings globally compliant for the metal, steel, plastic, aluminum and concrete industries.







# COLOUR-FIL

# 1K POLYURETHANE ISOCYANATE-FREE PAINT

## COLOUR-FIL

### POLYURETHANE PAINT

The PU-8000 Polyurethane Paint is a premium quality, single stage, direct to metal (DTM), Low VOC topcoat. PU-8000 is isocyanate-free and has been formulated with premium ingredients to provide the ultimate in performance.

#### Featured Specifications Of Our Polyurethane Paint Line

- ❖ DIRECT TO METAL TECHNOLOGY - NO HARDENER REQUIRED
- ❖ CUSTOMIZED DRYING TIME TO MEET YOUR SPEED OF DRY REQUIREMENTS
- ❖ WET ON WET APPLICATION, INCREASED THROUGH PUT PRODUCTION
- ❖ EXCEPTIONAL HIDING PROPERTIES, RESULTING IN A MINIMUM OF 20% SAVINGS ON YOUR MATERIAL
- ❖ READY TO SPRAY
- ❖ LOW TRAVELLING OVERSPRAY. CAN BE SPRAYED IN & OR OUTDOOR/OPEN AREAS
- ❖ SUPERIOR RESISTANCE AND COVERAGE VALUES
- ❖ EASY TO APPLY WITH VARIOUS INDUSTRIAL SPRAY EQUIPMENT
- ❖ GLOBAL LOW VOC COMPLIANT
- ❖ MADE WITH PREMIUM QUALITY RAW MATERIALS
- ❖ OEM FINISH, RICH HIGH GLOSS
- ❖ SUPERIOR POT LIFE



### COLOUR-FIL PU-8000

POLYURETHANE PAINT, ISO-FREE

#### Air Dry 21C/70F

Dust Free 20 - 25 Minutes\*

Dry 2-3 Hours

Dry To Polish 12 Hours/Overnight

#### Force Dry 60C/140F

Dry 20 - 30 Minutes

Dry To Polish 1-1.5 Hours after cooling

#### Pot Life

2.5 - 3 Hours @ 21C / 70F



3.78 L / 1 US GALLON  
18.9 L / 5 US GALLONS  
50.0 L / 1 US DRUM

[CLICK TO VIEW PDS](#)

[CLICK TO VIEW MSDS](#)





# CHROMA-FIL

# 2K HIGH BUILD URETHANE PAINT

## CHROMA-FIL

### URETHANE PAINT

The UP-8500 Urethane Paint is a premium quality, Low VOC line formulated to provide the ultimate performance that would be expected from a urethane topcoat. This system has been designed to withstand aggressive environments, offering excellent resistance to weathering/pollution, corrosive materials, impact, and abrasion.

### Featured Specifications Of Our Urethane Paint Line

- ❖ HIGH PERFORMANCE URETHANE PAINT
- ❖ RICH, HIGH GLOSS AUTOMOTIVE OEM FINISH
- ❖ WET ON WET APPLICATION. INCREASED THROUGHPUT PRODUCTION
- ❖ EXCEPTIONAL HIDING PROPERTIES, RESULTING IN A MINIMUM OF 20% SAVINGS ON YOUR MATERIAL
- ❖ SUPERIOR ADHESION STRENGTH AND LIFELINE STABILITY
- ❖ TAILOR MADE CUSTOMIZED DRYING TO MEET YOUR FACILITIES REQUIREMENTS
- ❖ USED FOR APPLICATIONS WITH HIGH CORROSION PROTECTION REQUIREMENTS
- ❖ EASY TO APPLY WITH VARIOUS INDUSTRIAL SPRAY EQUIPMENT
- ❖ GLOBAL LOW VOC COMPLIANT
- ❖ MADE WITH PREMIUM QUALITY RAW MATERIALS
- ❖ EXCELLENT FLOW AND APPLICATION PROPERTIES
- ❖ SUPERIOR POT LIFE



## CHROMA-FIL UP-8500 URETHANE PAINT

### Air Dry 21C/70F

Dust Free 20 - 30 Minutes\*

Dry 3-4 Hours

Dry To Polish 12 Hours/Overnight

### Force Dry 60C/140F

Dry 20 - 30 Minutes

Dry To Polish 1-1.5 Hours after cooling

### Pot Life

2.5 - 3 Hours @ 21C / 70F



3.78 L / 1 US GALLON  
18.9 L / 5 US GALLONS  
50.0 L / 1 US DRUM

[CLICK TO VIEW PDS](#)  
[CLICK TO VIEW MSDS](#)






# COMMONLY USED PRODUCTS IN INDUSTRIAL MANUFACTURING & REFINISHING



## DRY TO SAND TIME:



**Air Dry** (at 25°C / 78°F) : 2 ½ - 3 Hours

**Force Dry** (at 60°C / 140° F) : 20 - 30 Minutes from cooling


No sanding required when **P850** is used as a Sealer. Allow 40 - 45 minutes at 25°C/78°F prior to applying topcoat.

### TECHNICAL INFORMATION:

<b>Appearance:</b>	Gray Liquid
<b>Weight Per Gallon:</b>	4.85 kg - 5.28 kg / 10.69 lbs - 11.63 lbs
<b>% Solids By Weight:</b>	62 ± 2
<b>Specific Gravity:</b>	1.282 - 1.394
<b>Sand Time, Force Dry:</b>	20 - 30 Minutes
<b>Sand Time, Air Dry:</b>	2 ½ - 3 Hours @ 25° C / 77° F
<b>Pot Life:</b>	2 - 2½ Hours @ 20° C / 68° F
<b>Mix Ratio:</b>	4 : 1 as a Primer, 4 : 1: 1 as a Sealer
<b>Required Catalyst:</b>	H-853 PRIME-FIL Hardener
<b>Reducer:</b>	R-121/R-122/R-123

### Available Packaging Units

3.78 L / 1 US GALLON 18.9 L / 5 US GALLONS 50.0 L / 1 US DRUM

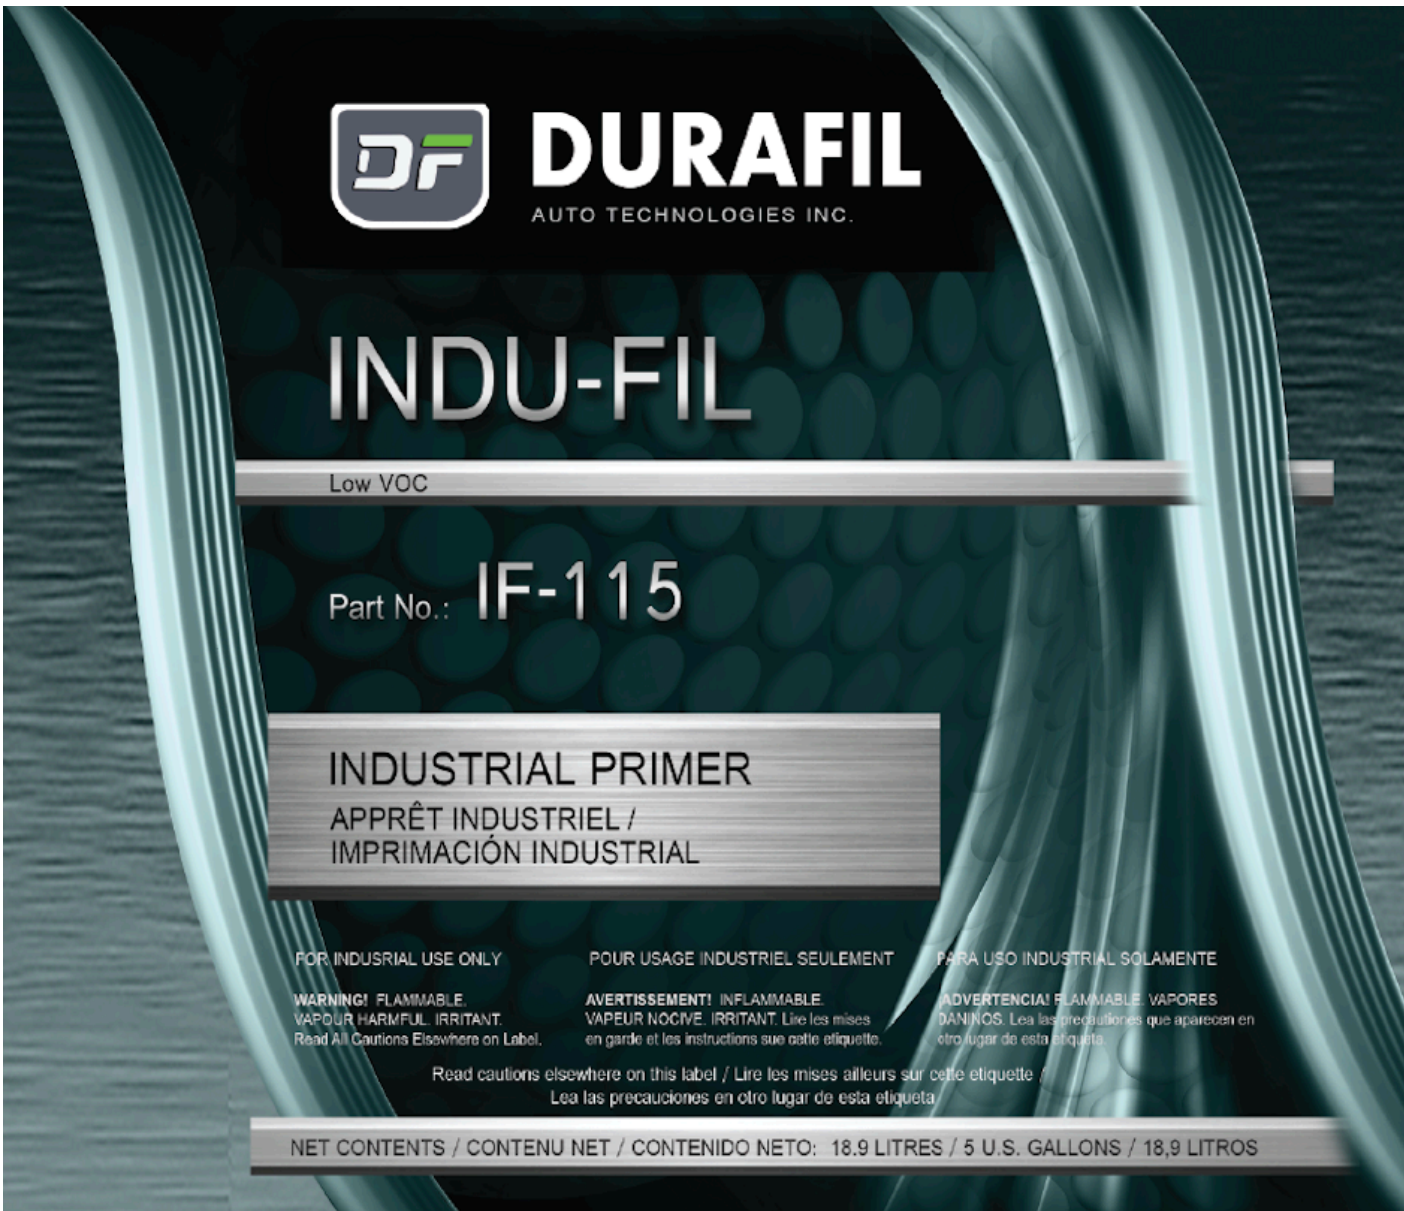

## DRY TIME:



**Dry Time @ 21 °C / 70 °F, with 50% Relative Humidity**

**Dry To Touch:** 15 - 20 Minutes

**Tack Free:** 25 - 30 Minutes

**To Recoat:** 30 Minutes

**Hard:** 24 Hours

### TECHNICAL INFORMATION:

<b>Appearance:</b>	Gray Liquid
<b>Finish:</b>	Low Gloss
<b>% Solids By Weight:</b>	46 ± 5
<b>Specific Gravity:</b>	1.18 - 1.26
<b>Salt Spray Test (ASTM B117):</b>	150 Hours
<b>Pot Life:</b>	Not Applicable
<b>Mix Ratio, by Volume:</b>	4 Parts IF-115 : 1 Part Reducer

### Available Packaging Units

3.78 L / 1 US GALLON 18.9 L / 5 US GALLONS 50.0 L / 1 US DRUM





# COMMONLY USED PRODUCTS IN INDUSTRIAL MANUFACTURING & REFINISHING



**CLEAN-FIL CF-125 Silicone & Wax Remover** is a Low VOC cleaner fomulated to easily and quickly remove silicone, wax, oil, grease, and other residue and contaminants from surfaces to be refinished. **CF-125** can be applied to metal, painted, primed, plastic, and fiberglass surfaces. **CF-125** is designed to be used before and after sanding, to clean and remove residue from the surface to be refinished. **CF-125** must also be applied to clean the repair surface again before applying any ground or top coat, such as primer, paint, or sealer to remove any residue from surface .

**APPROVED SUBSTRATES:** On metal, cured primed and painted surfaces, plastic and fiberglass surfaces.

**SURFACE PREPARATION:** Apply a liberal amount of **CF-125** to a clean, lint free cloth/rag. Rubbing briskly, wipe off oil, wax, grease, and other contaminants from the surface. It is recommended that cloths/ rags be changed frequently to prevent the spreading of residue and other contaminants. Wipe dry surface immediately after applying **CF-125**. Do not let **CF-125** air dry on panel.

In case of hard to remove residue, repeat the entire application using new, clean cloths until the surface is completely clean.

**Available Packaging Units**  
**3.78 L / 1 US GALLON    18.9 L / 5 US GALLONS    50.0 L / 1 US DRUM**





# INDUSTRIES SERVICED BY DURAFIL AUTO TECHNOLOGIES

## Oil & Gas Equipment

### Protects Against

- UV radiation
- Abrasion (ie. sand storms)
- Chemical spillages
- Heat
- Corrosion and chemical exposure

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Uniform quality and appearance
- Gloss and colour retention guaranteed to withstand the toughest operating conditions.
- OEM quality finish



## Water & Waste Management

### Protects Against

- UV radiation
- Extreme Weather
- Rusting
- Corrosive Waste
- Impact and wear/tear
- Waste spillage

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Outdoor paint application for refurbishing needs - Environmentally Safe
- Customized drying for holding facility and/or outdoors storage
- Up to 30% less product consumption
- A guaranteed lifetime extension for your equipment







# INDUSTRIES SERVICED BY DURAFIL AUTO TECHNOLOGIES

## Marine, Aircraft, Railroad Transportation

### Protects Against

- UV radiation
- Abrasion (ie. sand storms)
- Chemical spillages
- Heat
- Corrosion and chemical exposure

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Uniform quality and appearance
- Gloss and colour retention guaranteed to withstand the toughest operating conditions.
- OEM quality finish



## Industrial Storage and Cargo Containers ✓

### Protects Against

- UV radiation
- Extreme Weather
- Rusting
- Corrosive Waste
- Impact and wear/tear
- Waste spillage

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Outdoor paint application for refurbishing needs - Environmentally Safe
- Customized drying for holding facility and/or outdoors storage
- Up to 30% less product consumption
- A guaranteed lifetime extension for your equipment







# INDUSTRIES SERVICED BY DURAFIL AUTO TECHNOLOGIES



## Truck Bodies, Roll Off Bodies, Trailers

### Protects Against

- UV radiation
- Abrasion
- Rigors of the Road
- Extreme Weather
- Rusting
- Impact and wear/tear
- Corrosion and chemical exposure

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Uniform quality and appearance
- Guaranteed reduction of downtime and repairs
- Gloss and colour retention guaranteed to withstand the toughest operating conditions.
- OEM quality finish
- A guaranteed lifetime extension for your equipment

## Fleet

### Protects Against

- UV radiation
- Abrasion
- Rigors of the Road
- Extreme Weather
- Rusting
- Impact and wear/tear
- Corrosion and chemical exposure

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Uniform quality and appearance
- Guaranteed reduction of downtime and repairs
- Gloss and colour retention guaranteed to withstand the toughest operating conditions.
- OEM quality finish
- A guaranteed lifetime extension for your fleet





## Agricultural & Mining Equipment

### Protects Against

- UV radiation
- Extreme Weather
- Rusting
- Corrosive Waste
- Impact and wear/tear
- Waste spillage

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Outdoor paint application for refurbishing needs - Environmentally Safe
- Customized drying for holding facility and/or outdoors storage
- Up to 30% less product consumption
- A guaranteed lifetime extension for your equipment



## Construction Metal, Industrial Framing, Tankers

### Protects Against

- UV radiation
- Abrasion (ie. sand storms)
- Chemical spillages
- Heat
- Corrosion and chemical exposure

### Warrants

- Direct to metal (DTM) - both for manufacturing and refurbishing application
- Uniform quality and appearance
- Gloss and colour retention guaranteed to withstand the toughest operating conditions.
- OEM quality finish

